




OCHRE LIVING

# Hotham

## Complete Fireplace Kit

With its slimmer look, the Hotham Outdoor Fireplace is sure to be a welcome addition to backyards of any size, even those that don't have much space.

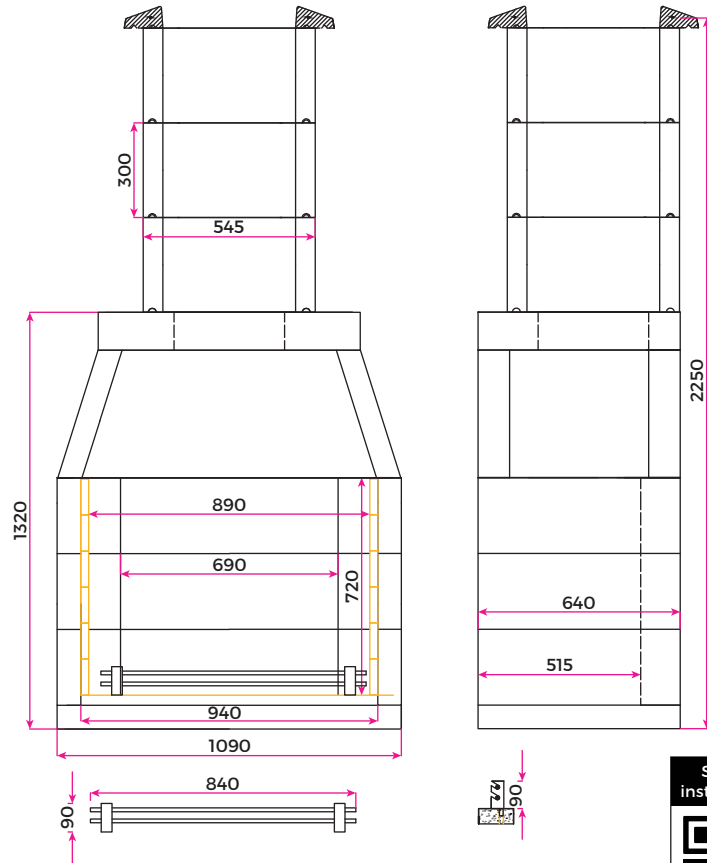

### Installation Brief

We recommend a minimum 100mm thick reinforced concrete slab to bed the Hotham onto. The size should be at least 150mm wider than the Hotham on all 4 sides. All the pumice components to be joined with jointing adhesive using the application bags provided. Use a spirit level to check and level as you go. The finished joints should be 2-3mm thick.

The external surface of the fireplace can be coated with the enclosed external render mix supplied and or painted with breathable waterproof masonry paint. They can also be customised with feature stone to suit your decor.

Base Firebricks to be laid first, followed by the back bricks then the sides. Please allow the Hotham 72 hours to dry before using. Please note 75mm distance is required to combustible material.

### Specifications

<b>Dimensions</b>	1090L x 640W x 2250mm H
<b>Fireplace Opening</b>	940L x 515W x 720mm H
<b>Weight</b>	960kg
<b>Accessories</b>	Log Store, Cooking Grill, Rain Cap, Chimney Extension Blocks

<b>Material</b>	Pumice
<b>Warranty</b>	5 years
<b>Delivery</b>	To door or commercial depot

OchreLivingAU    

www.ochreliving.com.au | T. 1300 212 213