


Perisher Complete Fireplace Kit

Our latest and greatest design, the Perisher Outdoor Fireplace will truly be a head-turner in your garden. Although it's our largest model, it's just as easy to install as the others.

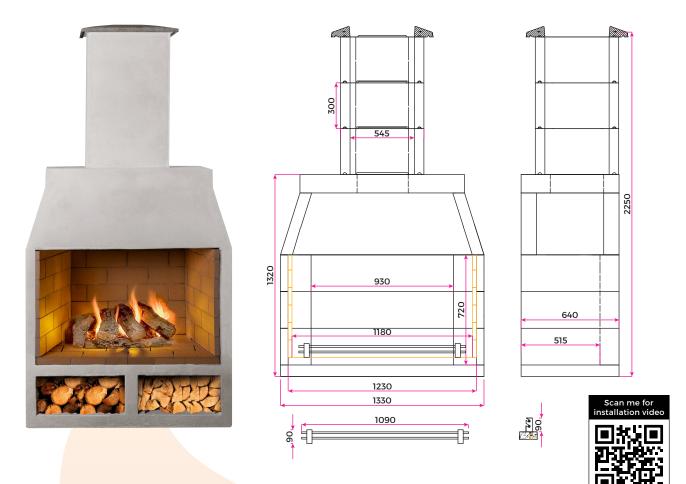

Installation Brief

We recommend a minimum 100mm thick reinforced concrete slab to bed the Perisher onto. The size should be at least 150mm wider than the Perisher on all 4 sides. All the pumice components to be joined with jointing adhesive using the application bags provided. Use a spirit level to check and level as you go. The finished joints should be 2-3mm thick.

The external surface of the fireplace can be coated with the enclosed external render mix supplied and or painted with breathable waterproof masonry paint. They can also be customised with feature stone to suit your decor.

Base Firebricks to be laid first, followed by the back bricks then the sides. Please allow the Perisher 72 hours to dry before using. Please note 75mm distance is required to combustible material.

Specifications

Dimensions	1330L x 640W x 225 <mark>0mm H</mark>		
Fireplace Openir	ng 1180L x 515W x 72	1180L x 515W x 720 <mark>mm H</mark>	
Weight	1100kg		
Accessories	Log Store, Cookir	ng Grill, Rain Cap,	
	Chimney Extensi	on Blocks	

Material	Pumice
Warranty	5 years
Delivery	To door or commercial depot

OchreLivingAU f in
P
www.ochreliving.com.au | T. 1300 212 213